

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US2005/043592

International filing date: 02 December 2005 (02.12.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/632,689
Filing date: 03 December 2004 (03.12.2004)

Date of receipt at the International Bureau: 03 March 2006 (03.03.2006)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1432484

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

February 23, 2006

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/632,689

FILING DATE: *December 03, 2004*

RELATED PCT APPLICATION NUMBER: *PCT/US05/43592*

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US60/632,689*



Certified by

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

120304

22713 U.S. PTO

PTO/SB/16 (04-04)

Approved for use through 07/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No.

60/632689 U.S. PTO

120304

INVENTOR(S)					
Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)			
Yaser S.	Abdelsamed	Granville, Ohio			
<i>Additional inventors are being named on the _____ separately numbered sheets attached hereto</i>					
TITLE OF THE INVENTION (500 characters max)					
LUMINAIRE HAVING IMPROVED PRISM TRANSITION					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number: 22902					
OR					
<input type="checkbox"/> Firm or Individual Name					
Address					
Address					
City		State		Zip	
Country		Telephone		Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages <u>6</u>					
<input type="checkbox"/> CD(s), Number _____					
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets <u>2</u>					
<input type="checkbox"/> Other (specify) _____					
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.					
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees.					
<input checked="" type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: <u>50-1088</u>					
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
FILING FEE Amount (\$)					
160.00					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE

TYPED or PRINTED NAME Conrad J. Clark

TELEPHONE 202-835-1111

[Page 1 of 2]

Date

REGISTRATION NO. 30,340

(if appropriate)

Docket Number: 11059-0006

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

LUMINAIRE HAVING IMPROVED PRISM TRANSITION

TECHNICAL FIELD

[01] This invention relates to the art of luminaires. In particular the invention relates to the art of reflectors for luminaires formed of a series of prisms that provide total internal reflection.

BACKGROUND ART

[02] Luminaires are known that comprise a series of generally vertical, right-angle prisms for reflecting light from a centrally located lamp. The reflectors for these luminaires are made with transparent material (glass, acrylic, etc.) and typically have sets of longitudinal prisms running from top to bottom. The reflector typically has a desired overall contour provided by the series of prisms. In most cases the desired overall contour is dome-like, with an upper part of smaller diameter and a lower part of larger diameter. This configuration results in the requirement that the prisms become gradually broader toward the lower part of the luminaire. If all of the prisms around the circumference of the reflector ran the full height of the reflector, the prisms would be very large at the largest circumference and very small at the smallest circumference. The requirement that the prisms become broader means that the thickness of the wall of the luminaire must increase toward the larger circumference, which increases the cost and weight of the luminaire.

[03] To make the prism sizes manageable, it is known to provide two or more sets of prisms. One set of prisms, referred to herein as main prisms, runs the entire length, while the other set or sets, referred to herein as transition prisms, begins at the larger circumference and transitions out along the reflector. By this arrangement, fewer prisms are provided at the smaller circumference, and the uniformity of the prism sizes is improved.

[04] A problem presented by this arrangement is that the contours of the main prisms (i.e., those that extend along the entire height of the reflector) and of the transition prisms (i.e., those that taper out along the height) differ by the degree of taper incorporated into the transition prisms. The resulting reflector geometry is, therefore, a combination of the two, or more, geometries of the sets of prisms, and the resulting light

pattern is the net sum of the light patterns generated by the distinct reflector geometries. A known luminaire having such a reflector is shown in United States Patent 4,839,781.

[05] Thus, the design of the reflector to achieve a desired light pattern requires tradeoffs in the different geometries. For example, this configuration may require the main beam to be higher than needed to compensate for a transition beam lower than needed to achieve a beam at the actual desired angle.

SUMMARY OF THE INVENTION

[06] In accordance with the invention, a reflector for a luminaire having a plurality of longitudinal prisms is constructed such that the geometry of the main prisms is the same as the predominate geometry of the transition prisms. This arrangement allows greater control over the light pattern because the trade offs of the prior art are obviated.

[07] According to the new configuration, the transition prisms are arranged such that they have the same configuration as the main prisms over the majority of the lengths of the main prisms (i.e., the height of the reflector) and then merge into the main prisms quickly. This configuration may be visualized as comprising transition prisms that are essentially identical to the main prisms over the major part of the reflector, with the peaks of the transition prisms aligned with the valleys of the main prisms. In the transition zone, the peak of each transition prism merges quickly into a respective valley of a main prism. For example, the radius of curvature of the peak of the transition prism in the transition zone may be 2-4 inches such that the transition zone is very short. In a preferred embodiment, where the overall height of the reflector is about 11 inches, the radius of curvature of the peak of the transition prism is 3 inches, the transition zone begins at about 7.5 inches from the bottom of the reflector, and the length of the transition zone is about one inch.

[08] An object of this invention is to provide an improved prism-type reflector for a luminaire having a short transition zone.

[09] Another object of this invention is to provide an improved prism-type reflector for a luminaire having two or more sets of prism reflectors having essentially identical geometries.

BRIEF DESCRIPTION OF THE DRAWINGS

- [10] Figure 1 is a perspective of a portion of a prior-art reflector.
- [11] Figure 2 is a top plan view of a reflector in accordance with the invention.
- [12] Figure 3 is a cross section taken along line 3-3 of figure 2.
- [13] Figure 4 is a cross section taken along line 4-4 of figure 2.
- [14] Figure 5 is a cross section taken along line 5-5 of figure 2.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[15] With reference to figure 1, a section 2 of a prior art reflector is shown to illustrate a known technique for providing transition prisms. In the prior arrangement, the reflector includes a series of longitudinally extending main prisms 4 and a series of transition prisms 6. The series of main prisms and the series of transition prisms are interleaved whereby there are more prisms in the region of the reflector having a larger circumference.

[16] It will be seen from figure 1 that each main prism 4 had a peak 8 and a valley 10. It will further be appreciated that each of the transition prisms has a peak 12 that gradually merges into the valley 10. As shown in figure 1, in the usual configuration the peaks 12 of the transition prisms merge into the valleys 10 gradually over the overall height of the reflector. This means that the curvature of the peaks 12 of the transition prisms differs from the curvature of the peaks 8 of the main prisms. In essence, the peaks 12 are tilted inward toward the valleys 10, which reflect the light incident on those prisms into an area different from that into which the main prisms reflect light.

[17] With reference to figure 2, a reflector 14 in accordance with the invention includes a plurality of main prism reflectors 16. The dome-like overall curvature is shown in figure 3, which is a cross section through the peaks of the main prisms. In a preferred embodiment, there are 72 identical main prisms circumferentially arranged to form about the reflector 14. Of course, that number may be increased or decreased, and the prisms do not necessarily have to be identical depending on the light pattern to be obtained.

[18] The reflector 14 also includes a number of transition prisms circumferentially arranged about the reflector. These transition prisms are interleaved with the main prisms such that they fill in the valleys of the main prisms and then

transition into the valleys. It is this transition that forms a primary feature of this invention. In the preferred embodiment there are also 72 transition prisms.

[19] With reference to figure 4, which is a cross section taken along line 4-4 of figure 2 through the peak of a transition prism and the valley of a main prism. It will be seen that the transition prisms extend over a major part of the height of the reflector. Furthermore, the curvatures of the transition prisms 18 are the same as those of the main prisms 16 over all but a small part of the height of the transition prism. That is the transition region 20 is made short to reduce significantly the optical effect of the geometry required by the transition. In the preferred embodiment, the transition zone is circular in vertical cross section with a radius of curvature of about 3 inches; its height is about one inch. The shape of the transition zone may vary from that of a circle and may be linear, parabolic, stepped or other shapes.

[20] Reducing the size of the transition zone has been found to significantly reduce its effect whereby the resulting lighting pattern more closely matches the design intent. It will be appreciated that the transition zone should be as small as possible given manufacturing realities so as to provide the minimum flux capture from that zone. In some instances it may be possible to eliminate the transition zone by starting the transition prisms immediately at the desired location. This would result in the transition zone being essentially a step. In the preferred embodiment, the length of the transition zone is less than about ten percent of the height of the reflector and preferably less than five percent.

[21] It will be appreciated that the thickness of the wall of the reflector in the region 22 below the transition zone 20 is less than the thickness of the wall in the regions 24 above the transition zone. This is accomplished by matching the contour of the inner surface 26 of the sidewall 28 of the reflector to the contour of the valleys of the main prisms 16 above the transition and to the valleys of the transition prisms 18 below the transition.

[22] Figure 5 is a cross section taken along line 5-5 of figure 2. This cross section is taken along a line that passes through the valley of a transition prism 18 and just below the peak of a main prism 16. This figure, thus, shows how the valley of the transition prism merges, or transitions, into the valley of the main prism. In top view, the

locus of points of intersection between the valleys on opposite sides of a transition prism and the sidewalls of the adjacent main prisms form curved lines that intersect at the valley between two main prisms and appear as “pencil points” in figure 2.

[23] Manufacture of a reflector according to the preferred embodiment of the invention proceeds by modification of known techniques. For example, a typical reflector is manufactured by first cutting the prisms into a metal mold and then pouring molten glass or plastic into the mold. The prisms in the mold are the inverse of the prisms in the reflector and are cut into the metal mold by cutter tools having tips formed by right angled cutting surfaces. The movement of the cutter tools is controlled by a computer programmed to cut the grooves to the desired overall configuration. Thus, to manufacture a reflector according to the invention, the computer may direct the cutter to first cut the grooves for the main prisms. Then, the cutter is maneuvered to cut the transition prisms. The tip of the cutter cuts the peak of a reflecting prism, and when the cutter reaches the beginning of the transition zone, it is controlled to follow the prescribed curve (e.g., a circle of 3-inch radius) to meet with the surface of the mold that forms the inner surface of the reflector.

[24] Modifications within the scope of the appended claims will be apparent to those of skill in the art.

I claim:

1. A reflector for a luminaire comprising a shaped wall having a plurality of longitudinal main reflecting prisms and a plurality of transition reflecting prisms interleaved with said main reflecting prisms wherein the peak of each transition prism transitions into the valley of a respective main prism in a transition zone that is significantly shorter than the length of said main prism.

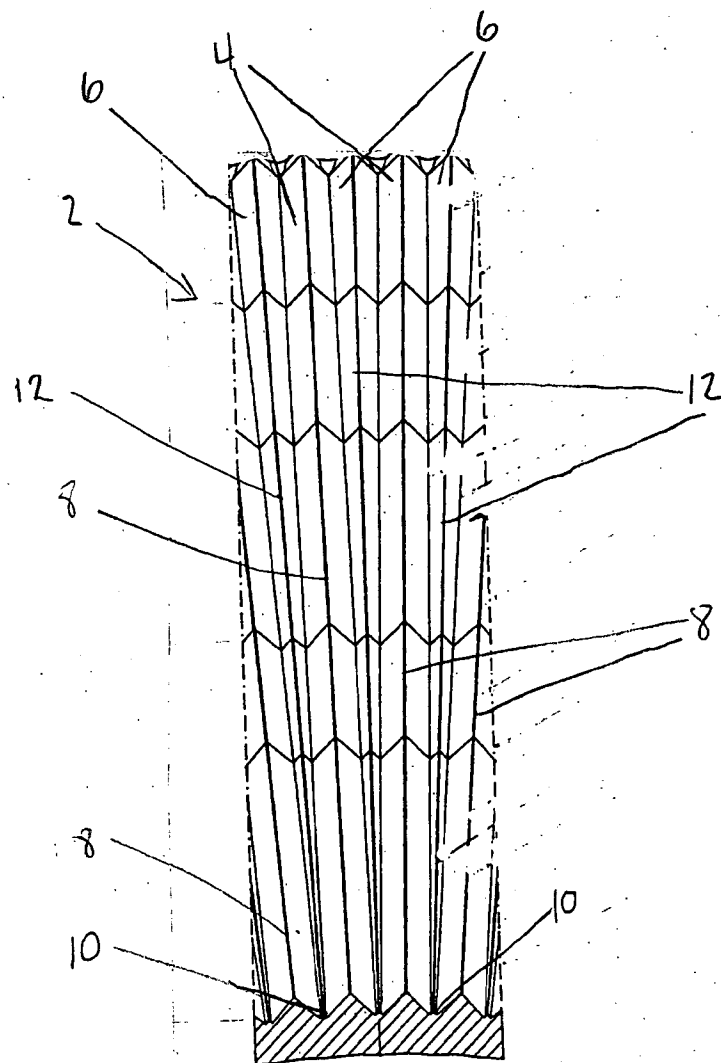


FIG 1
PRIOR ART.

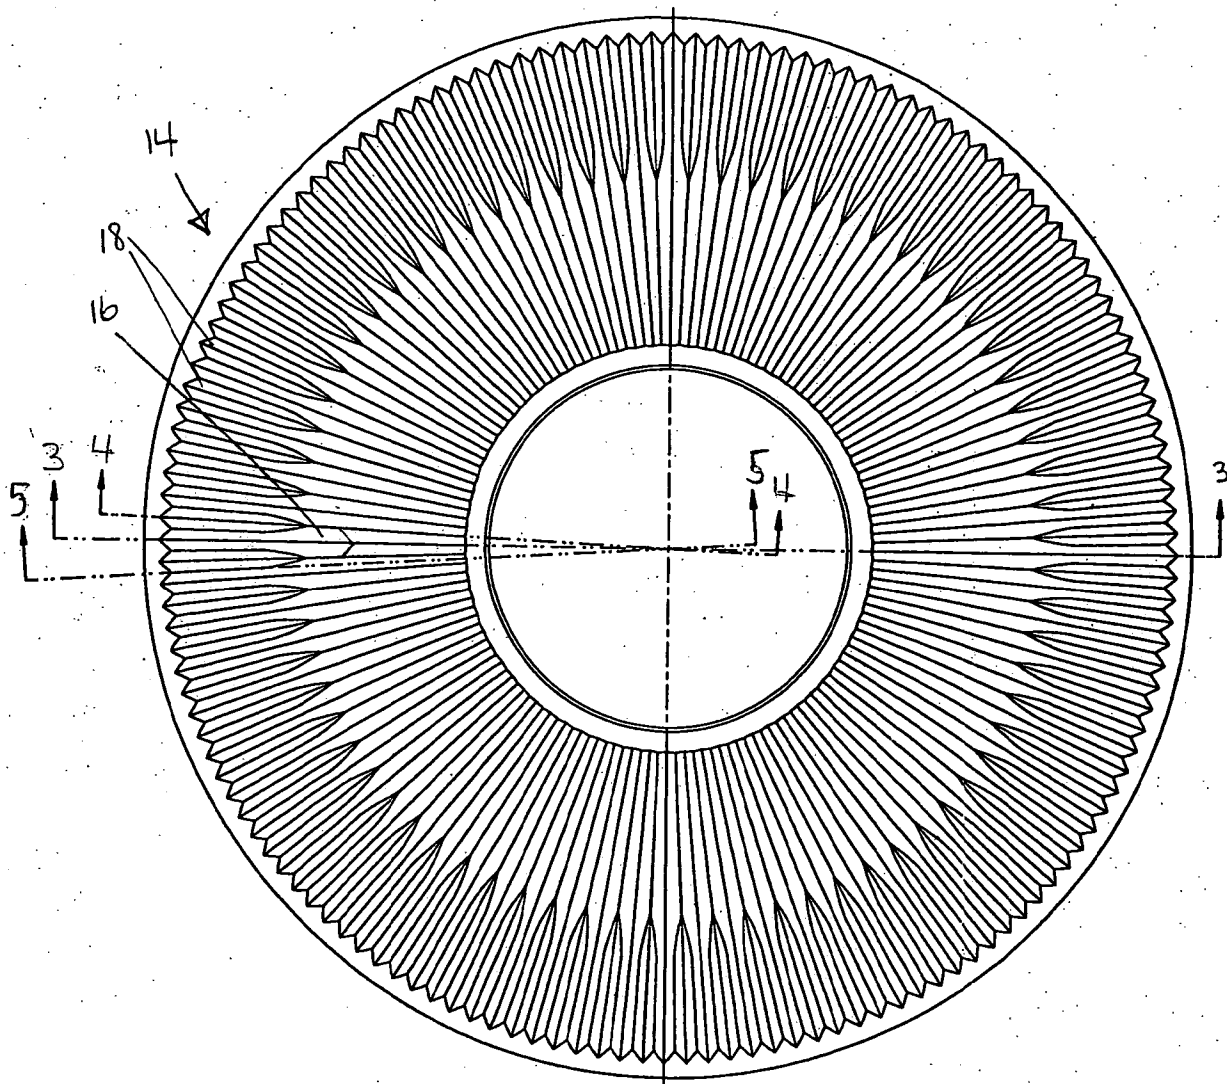


FIG. 2

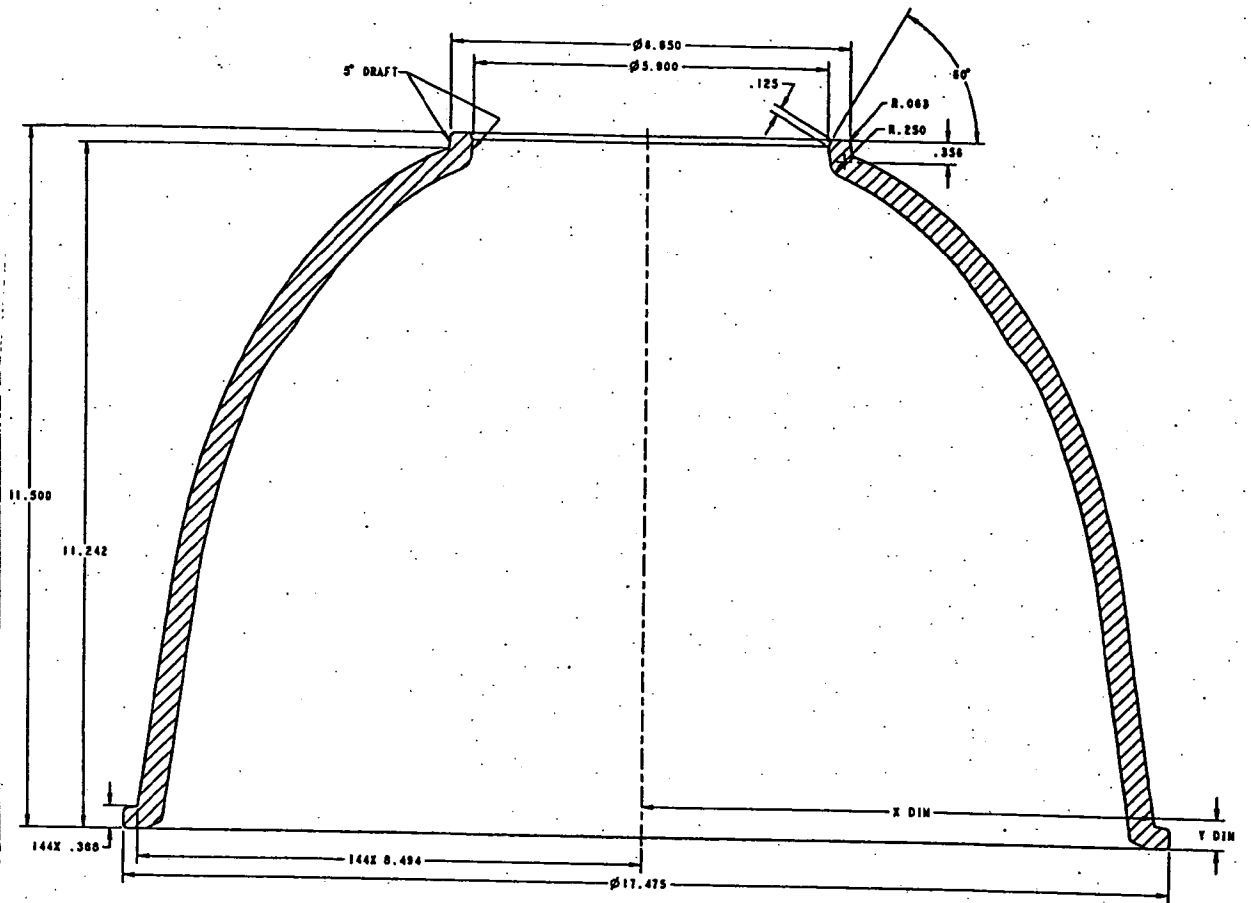


FIG 3

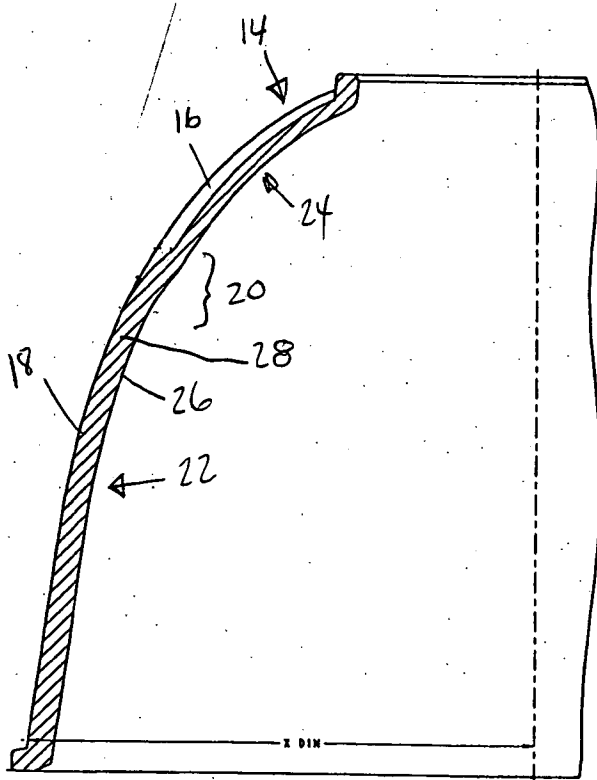


FIG 4

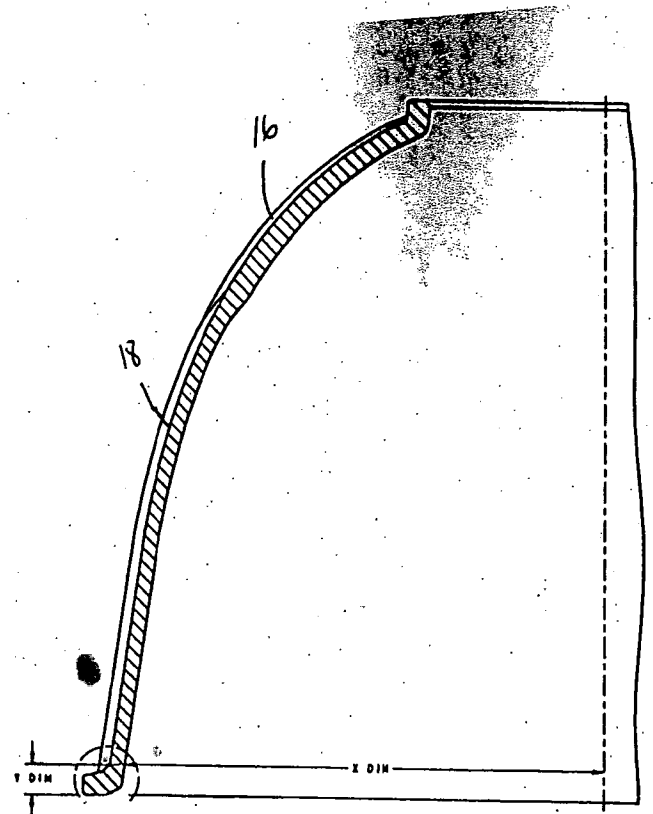


FIG 5